
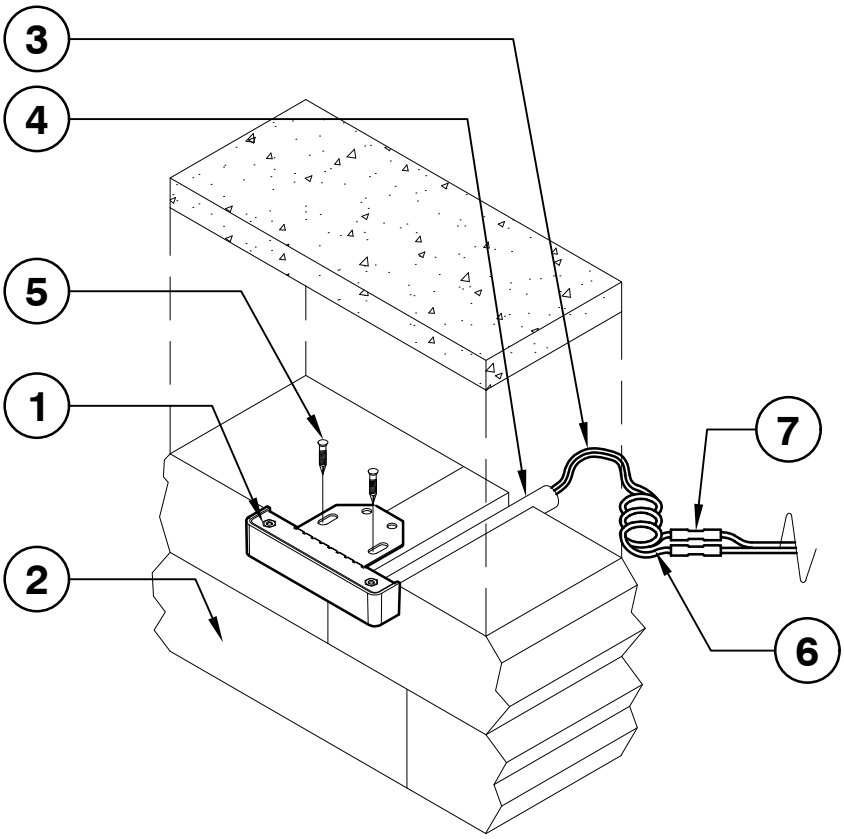


LEGEND:

1. FX LUMINAIRE CL-31 LEDGE LIGHT
2. HARDSCAPE WALL
3. POWER FEED
4. PVC SLEEVE
5. CONCRETE FASTENER
6. DIRECT BURY, UF/UL, COPPER, LOW VOLTAGE CABLE WITH UL 486D (IEC/EN 60998) RATED WATERPROOF CONNECTION. LEAVE 6 in. (150 mm) MINIMUM WIRE LOOP COILED BEHIND FIXTURE FOR FUTURE SERVICE
7. HEAT SHRINK CONNECTION



HEAT SHRINK CONNECTION

00

FX LUMINAIRE CL-31 LEDGE LIGHT WITH MOUNTING PLATE

NOT SCALE